

P/N 0E2210F23F

Cable reel s. 280, without transformer. Number of conductors 2, cable type 2 x 1 - H05 RN-F, cable length 14 + 1 (m). Equipped with both fluorescent lights 11W and supply voltage 230 V AC 50 Hz. Rewinding clutch as standard

SECTORS OF USE


Agriculture, Automotive, Cleaning, Building and road construction, Industry, Mining, Lube trucks and transports

FEATURES

Information	without transformer
Protection degree of electrical part	IP44
Environment temperature	-5÷+40 °C
Number of conductors	2
Cable type	2x1 - H05 RN-F
Cable length	14+1 m
Cable inlet	1,2 m
Inlet voltage	230 V AC - 50 Hz
Lamp power supply voltage	230 V AC - 50 Hz
Lamp connection	E27
Max power	11 W
Lamp protection degree	IP65
Light bulb supplied	p/n 0E728001
Rewinding clutch	yes
Lamp	p/n 0EF230
Packing	No. 1 - 0,043 m ³



OVERALL DIMENSIONS (mm)

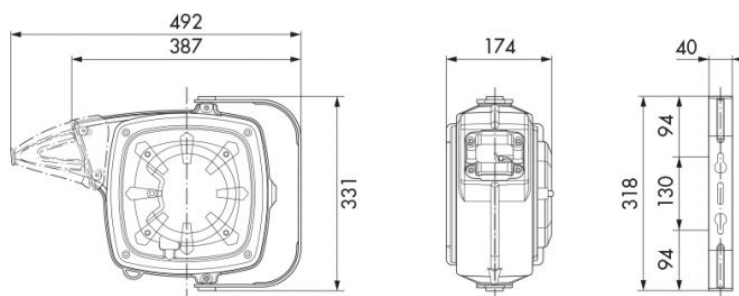

Gross weight

6,8 ÷ 8,8 kg