



HL-3300W

4 POST 4TON FLAT PLATFORM LIFT



Alignment
platform
(Option)

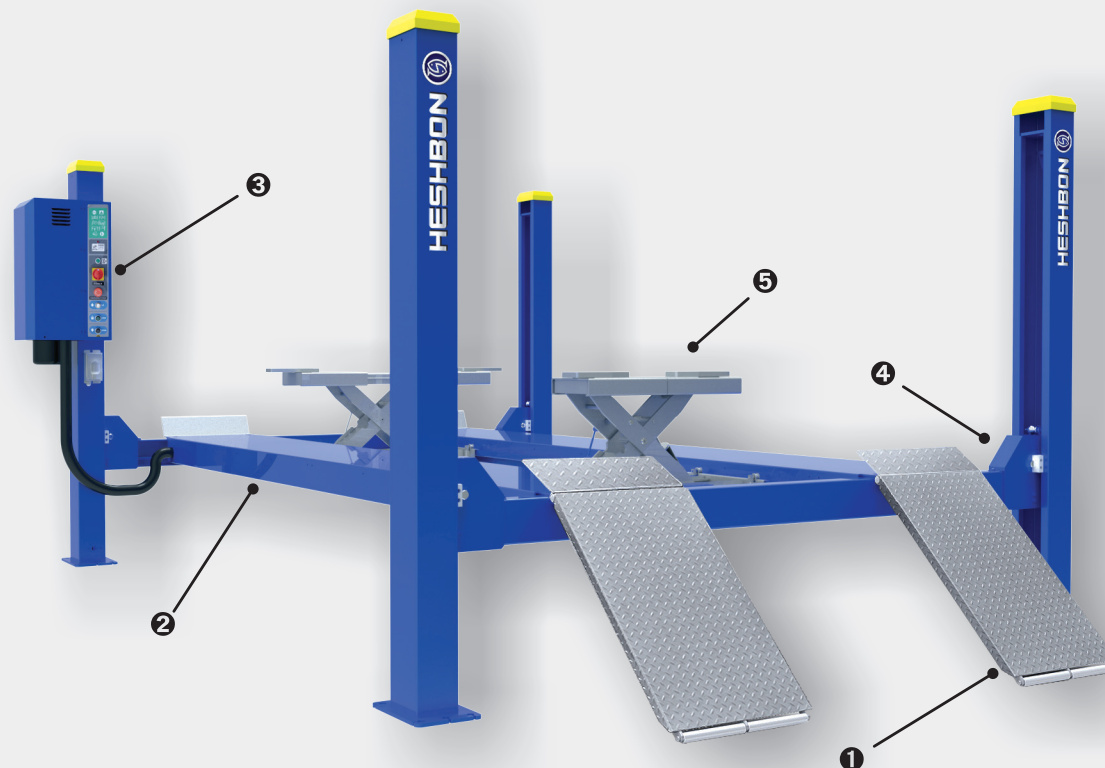

FEATURE

- Hydraulic cylinder located in the fixed platform and is thus perfectly protected.
- High resistance galvanized and pre-stretched lifting cable.
- Lock release lever for the emergency situation.
- Adjustable parking ratchet rails ensure the platforms and cross members horizontal within 4 wheel alignment tolerances.
- Automatic spring loaded eccentric brake system in the event of cable breakage and ensures complete stability during parking.
- Self lubricated large diameter pulleys and maintenance-free bushes.
- Hydraulic two-level 2ton scissor jack. (OPTION)
- Detachable alignment platform. (OPTION)
- Electric remote-controller. (OPTION)

SPECIFICATION

Model No.	HL-3300W
Lifting Capacity (kg)	Body : 4,000 / Jack : 2,000 kg
Max.Lifting Height (mm)	Body : 1,750 / Jack : 455 mm
Dimension (mm)	5,295(L) X 3,360(W) X 2,215(H)
Power Supply & Motor	1ph : 2.5HP, 4P, 220V, 50/60 Hz 3ph : 2HP, 4P, 220/380V, 50/60 Hz
Net Weight	1,450 kg

LAY-OUT

