



# maximus

MAXIMUS allows a comfortable suction of metal swarfs, wood tailings, debris, pieces of glass, exhausted oil, lubricating oil and any other kind of waste deriving from mechanical manufacturing. The cartridge filter which has a high filtration capacity and efficiency, is protected by a metal cone against direct impact of all kinds of debris creating the so called cyclone effect.


## VEWI375T VEWI375TP

|                                 |         |
|---------------------------------|---------|
| Number motors                   | 3       |
| Stage                           | double  |
| Volt (V)                        | 220-240 |
| Frequency (Hz)                  | 50/60   |
| Cooling                         | by pass |
| P max (W)                       | 3600    |
| P (W)                           | 3150    |
| Waterlift (mm H <sub>2</sub> O) | 2400    |
| Air flow (m <sup>3</sup> /h)    | 645     |
| LpA sonorus 3mt(dB(A))          | 68      |
| Total tank capacity (lt)        | 76      |
| Weight (Kg)                     | 29,8    |

## Accessories

| Description                                   | Cod. art.         | Q.ty |
|-----------------------------------------------|-------------------|------|
| 1 Complete flexible hose mt.2,5 Ø50           | <b>ACTF50C</b>    | 1 pz |
| 2 Crevice tool Ø50                            | <b>ACLP050</b>    | 1 pz |
| 3 Chrome curved extension wand Ø50            | <b>ACTS050</b>    | 1 pz |
| 4 Triangle Nozzle Ø50                         | <b>ACB0050T</b>   | 1 pz |
| 5 Nozzle body A/P L400 Ø50                    | <b>ACCS40050</b>  | 2 pz |
| 6 Slide-on for liquids nozzle L400            | <b>ACIL400DAV</b> | 1 pz |
| 7 Slide-on brush for floor nozzle L400        | <b>ACIP400DAV</b> | 1 pz |
| 8 Dusting brush Ø50                           | <b>ACPE050</b>    | 1 pz |
| 9 Antistatic flexible hose complete mt2,5 Ø50 | <b>ACTF50PUC</b>  | 1 pz |
| 10 Antistatic conic crevice tool Ø50          | <b>ACLC050A</b>   | 1 pz |
| 11 Antistatic corrugated squeegee Ø50         | <b>ACV0050A</b>   | 1 pz |
| 12 Antistatic conic accessory Ø50             | <b>ACTC050A</b>   | 1 pz |
| 13 Zinc plated crevice tool L500mm Ø50        | <b>ACLA050Z</b>   | 1 pz |
| 14 Zinc plated coupling for accessories Ø50   | <b>ACMG050Z</b>   | 1 pz |

### Kit: KITVEWI375T

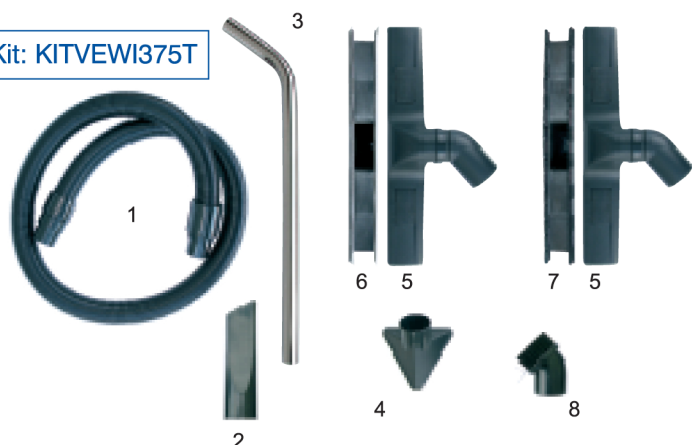

## Filters and optional

| Description                                    | Cod. art.         | note     |
|------------------------------------------------|-------------------|----------|
| 15 Shavings/oil separator for Maximus          | <b>KITSE440</b>   | optional |
| 16 Polyester filter with ring Ø44              | <b>FA044P</b>     | optional |
| 17 Cartridge filter Ø250- H178                 | <b>FI250178</b>   | optional |
| 18 Sponge filter for liquids                   | <b>ACCA165A</b>   | optional |
| 19 Accessory basket L450 Verso - Bottom        | <b>ACCE450V</b>   | optional |
| 20 Cyclon Ø300                                 | <b>CMCI300N</b>   | optional |
| 21 Complete squeegee tool                      | <b>ACVF060/C</b>  | optional |
| 22 Complete industrial nozzle L450 Ø50 wet/dry | <b>ACSC450IND</b> | optional |

### Kit: KITVEWI375TP

