




HL-46H

4 POST 6TON FLAT PLATFORM LIFT

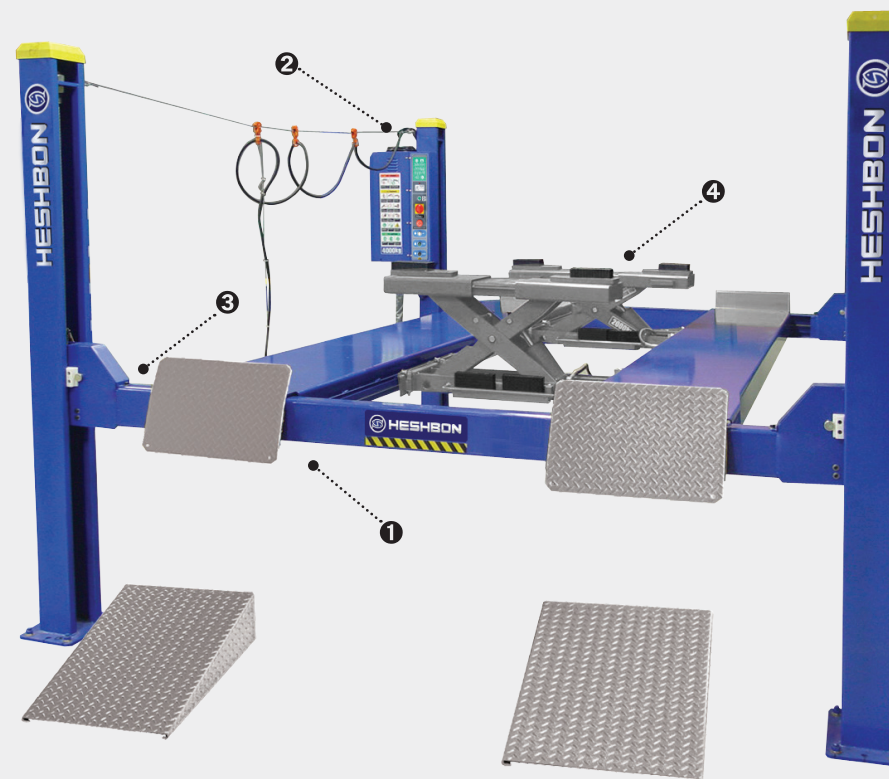

(Option)

Alignment
platform
(Option)

FEATURE

- Hydraulic cylinder located in the fixed platform and is thus perfectly protected.
- High resistance galvanized and pre-stretched lifting cable.
- Lock release lever for the emergency situation.
- Adjustable parking ratchet rails ensure the platforms and cross members horizontal within 4 wheel alignment tolerances.
- Automatic spring loaded eccentric brake system in the event of cable breakage and ensures complete stability during parking.
- Self lubricated large diameter pulleys and maintenance-free bushes.
- Hydraulic two-level 3ton scissor jack. (OPTION)
- Electric remote-controller. (OPTION)

SPECIFICATION

Model No.	HL-46H
Lifting Capacity (kg)	Body : 6,000 / Jack : 3,000 kg
Max.Lifting Height (mm)	Body : 1,750 / Jack : 595 mm
Dimension (mm)	7,384(L) X 3,616(H) X 2,215(W)
Power Supply & Motor	3ph : 3HP,4P,220/380V,50/60 Hz
Net Weight	1,690 kg

LAY-OUT

